

westomatic
make it happen

Autorista



WEEKLY CLEANING AND FILLING GUIDE



AUTORISTA

NB: THIS MACHINE MUST BE CLEANED DAILY

HYGIENE KIT

ALL MACHINES WILL BE SUPPLIED WITH A FULL HYGIENE & CARE KIT AS STANDARD.


WE RECOMMEND THAT YOU SWAP THE PARTS OUT, AND TAKE AWAY TO WASH, ENSURING THE PARTS ARE PROPERLY CLEANED AND MINIMISING MACHINE DOWNTIME.



AUTORISTA
HYGIENE KIT

WESTOMATIC
CARE KIT



CLEANING PARTS

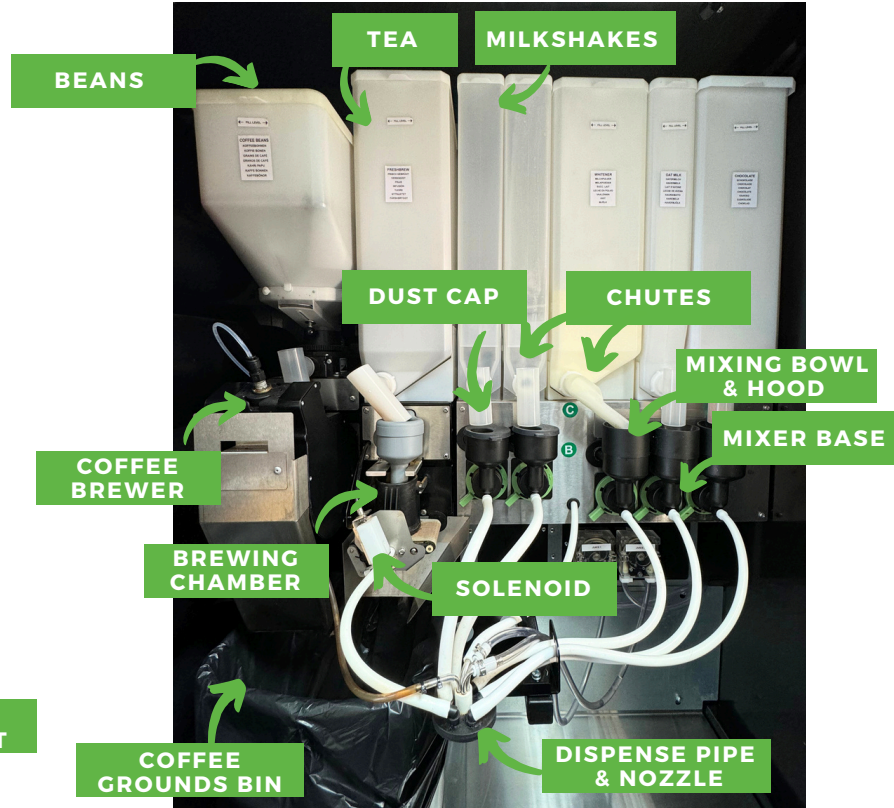

CLEANING PROCEDURE





IN ADDITION TO THE DAILY CLEANING, EACH WEEK THE MACHINE MUST HAVE A DEEPER CLEAN TO ENSURE PROPER HYGIENE & FUNCTIONALITY OF THE MACHINE

1 REMOVE NOZZLES AND CLEAN THE NOZZLE PLATE

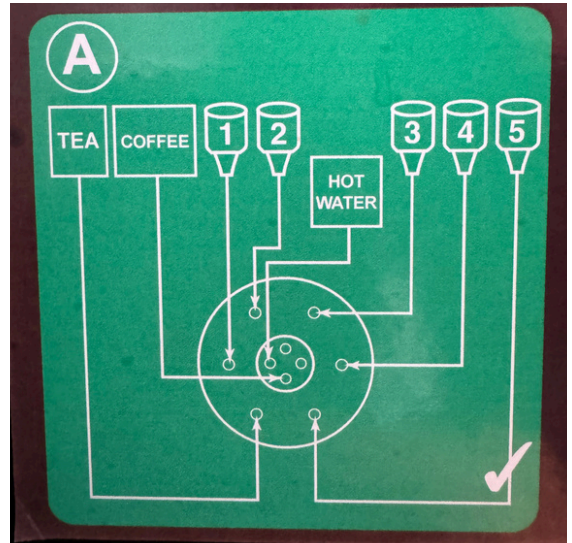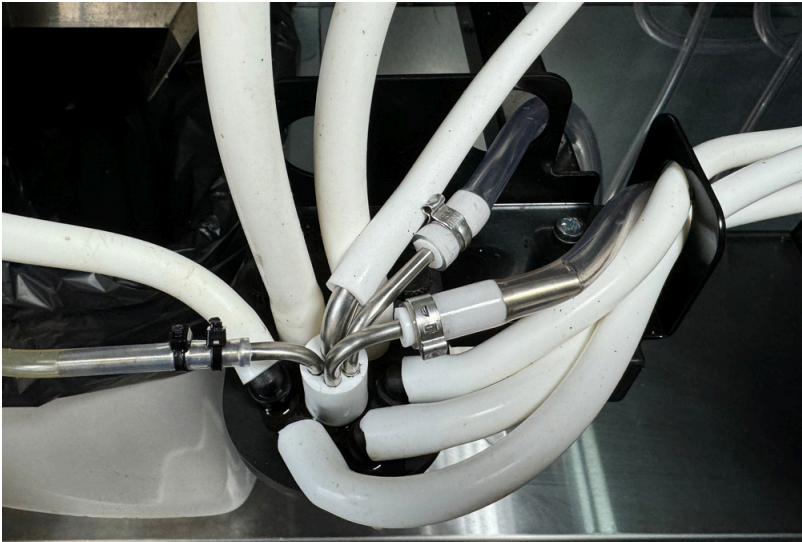

CLEANING PROCEDURE

- UNSCREW THE WASHERS ON THE PLATE AND REMOVE THE NOZZLE PLATE
- REMOVE ALL THE PLATE, NOZZLES, PIPES AND THE CENTRAL NOZZLE HOLDER
- WASH THOROUGHLY IN WARM SOAPY WATER & REASSEMBLE CORRECTLY - USING THE PIPE GUIDELINE LOCATED ON THE RIGHT WALL OF THE MACHINE

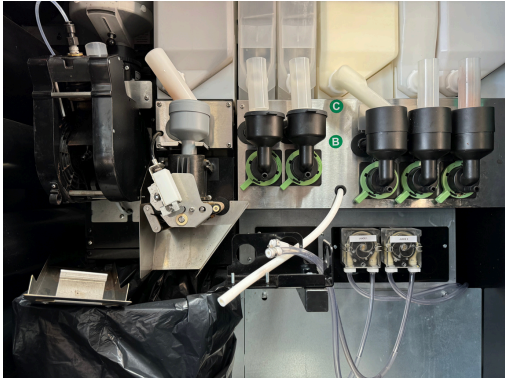


CLEANING PROCEDURE

2 REMOVE AND CLEAN THE TEA BREWER



START BY UNCLIPPING THE PIPE FROM THE SOLENOID

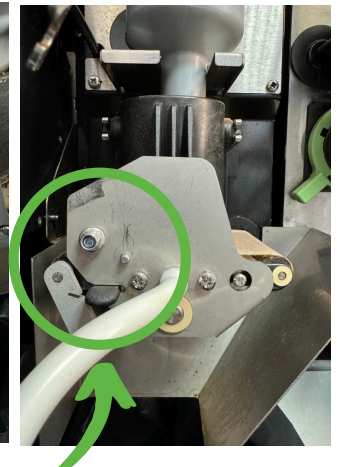


YOU MAY NEED TO LOOSEN THE BOLT AT THE BACK

CLEANING PROCEDURE




SLIDE THE LEVER TO THE LEFT

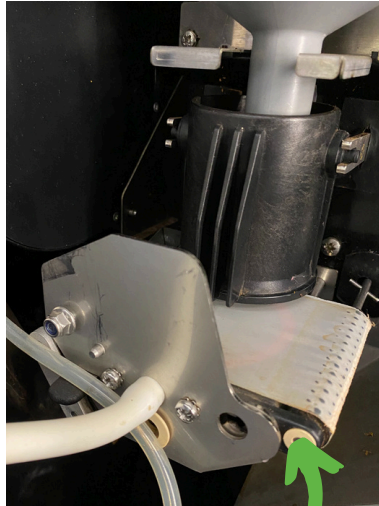

PULL THE FILTER PLATFORM FORWARDS



REMOVE THE BREWING CHAMBER & CLEAN

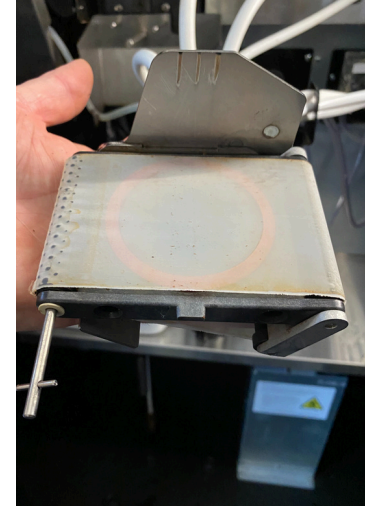




EVERY 5000 VENDS REPLACE FILTER BELT

REASSEMBLE ALL PARTS, ENSURING SOLENOID IS HELD IN PLACE WITH THE BOLT AT THE BACK, AND THE PIPE IS CLIPPED BACK INTO PLACE

CLEANING PROCEDURE

3 EXTENDED BREWER CLEAN

THIS TYPE OF CLEAN UTILISES A CLEANING TABLET TO REMOVE THE OILS LEFT IN THE BREWER AND HELPS TO KEEP THE DRINKS TASTING FRESH.

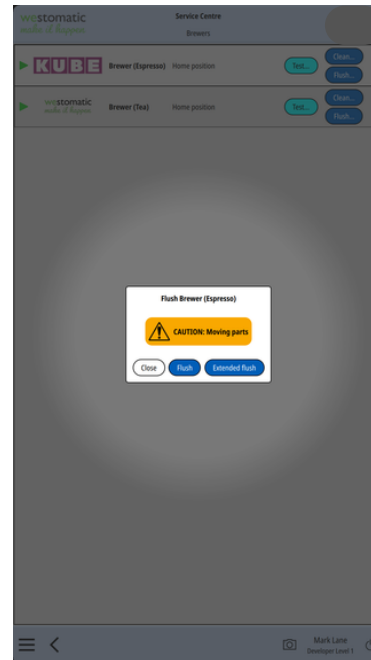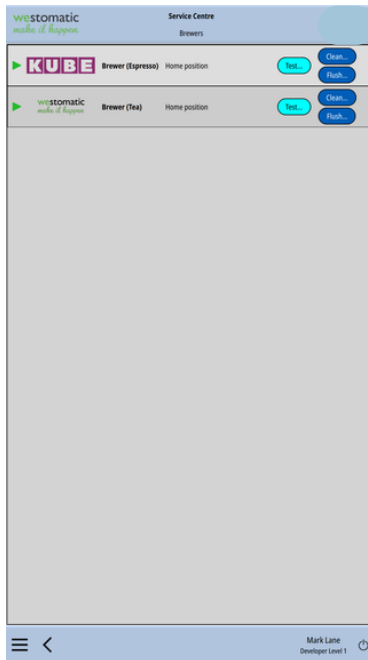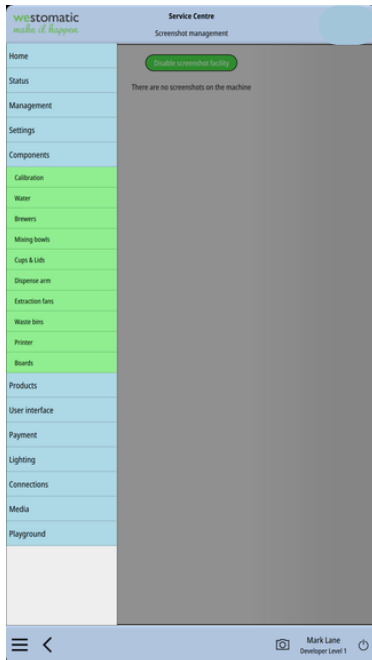

After you have cleaned the brewer parts, drop a Westomatic brewer cleaning tablet into the brewer chamber and perform a clean.

To do this use the menu icon, enter the component menu, and then brewers.

Select the KUBE brewer and press FLUSH or EXTENDED FLUSH.

The brewer will then perform a cleaning cycle flushing the tablet through.

EVERY 6 MONTHS

YOUR SERVICE TECHNICIAN WILL NEED TO DO THE FOLLOWING EVERY 6 MONTHS:

BOILER:

- De-scale, and clean.
- Replace Boiler valves

WATER:

- Replace Filters & Calibrate
- Check for leaks & check temperature

WHIPPER DECK:

- Clean Extraction
- Check all whipper motors
- Replace Hygiene parts, seals & O Rings

BREWER

- Remove and clean - Fit Service Kit
- Check Calibration
- Replace Grinder Blades if needed (30000 vends)
- Perform Cleaning Cycle

CUP SENSOR:

- Re-calibrate

MOVING DISPENSE HEAD:

- Check position - nozzles should align with cup dispense area

User Guide

4 SIMPLE STEPS

1

**PLACE CUP
IN DISPENSE AREA**

2

**TOUCH SCREEN, SELECT A DRINK,
CHOOSE YOUR OPTIONS**

3

**ALLOW MACHINE TO
DISPENSE DRINK**

4

**REMOVE CUP
& ENJOY**



CONTACT



Units 7-8 Block 4 Forde
Court, Forde Road,
Brunel Industrial
Estate, Newton Abbot,
Devon, TQ12 4BT

www.westomatic.com

westomatic
make it happen



+44 (0)1626 323100



support@westomatic.com



www.westomatic.com